



**LOCALLY DESIGNED & MANUFACTURED
FOR OVER 28 YEARS**



1,000,000 - 3,000,000 BTU/HR

NX SERIES

HIGH EFFICIENCY CONDENSING BOILERS




+ 604 523 0600

CALL US NOW

Standard Features

- ◇ ASME Rated SA 249 316L Stainless Steel Heat Exchanger
- ◇ Natural Gas, Propane
- ◇ AutoFlame Mini MK8 / Full MK8 Combustion Control
- ◇ UV Flame Detection
- ◇ Sealed Combustion Chamber
- ◇ Pressure Gauge
- ◇ NEMA-1 Rated Gas Train
- ◇ High Temperature Limit with Manual Reset
- ◇ Water Flow Switch with Low Water Cut-Off
- ◇ ASME Section IV or Section I Compliant

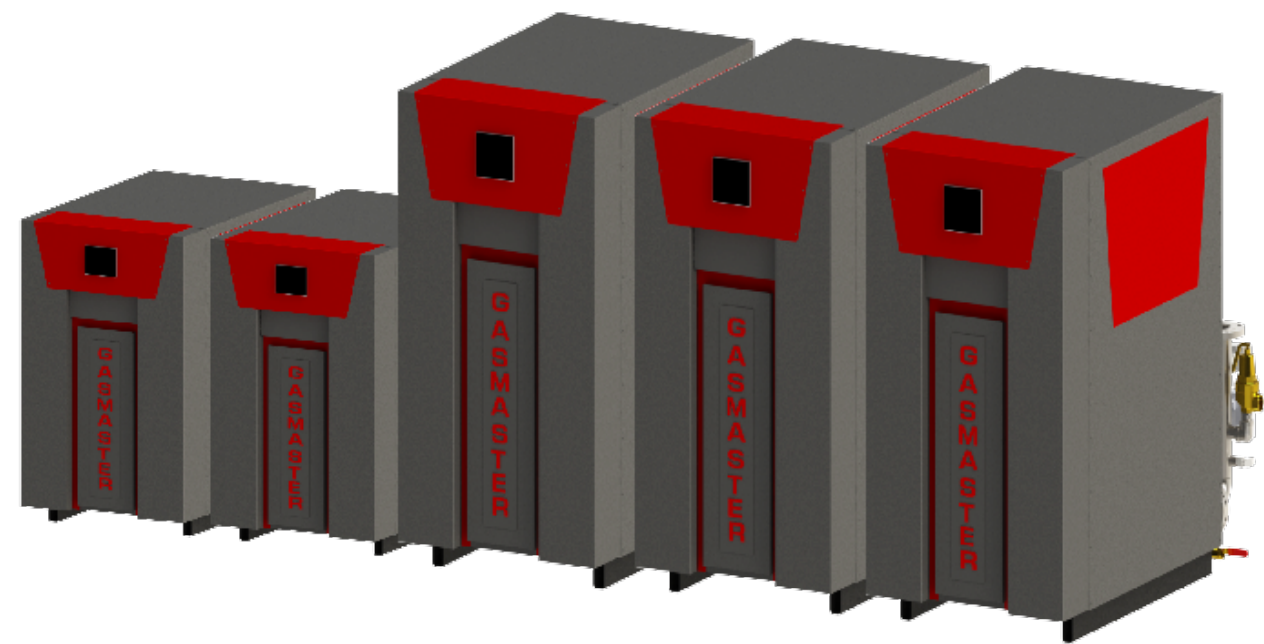


Heating Capacities: 1,000,000 to 3,000,000 Btu/hr

Premium Options

- | | | |
|--------------------------------------|------------------------------|---|
| ◇ Ultra Low NOx: <9PPM | ◇ CSD-1 Gas Train | ◇ Automatic Safety Shut-Off Valve with Proof of Closure |
| ◇ Modbus or BACNet Interface | ◇ Auxiliary Pump Relay | ◇ Custom Skid Design |
| ◇ Lead-Lag / Cascade (up to 8 units) | ◇ Alarm Bell on Lock-Out | ◇ Containerized |
| ◇ up to 20:1 Turndown Ratio | ◇ Condensate Neutralizer Kit | |
| ◇ Combustion Air Intake Adapter | ◇ Circulating Pump | |
| ◇ Secondary Low Water Cut-Off | ◇ Air Filter | |

NX Series
1,000,000 - 3,000,000BTU/hr

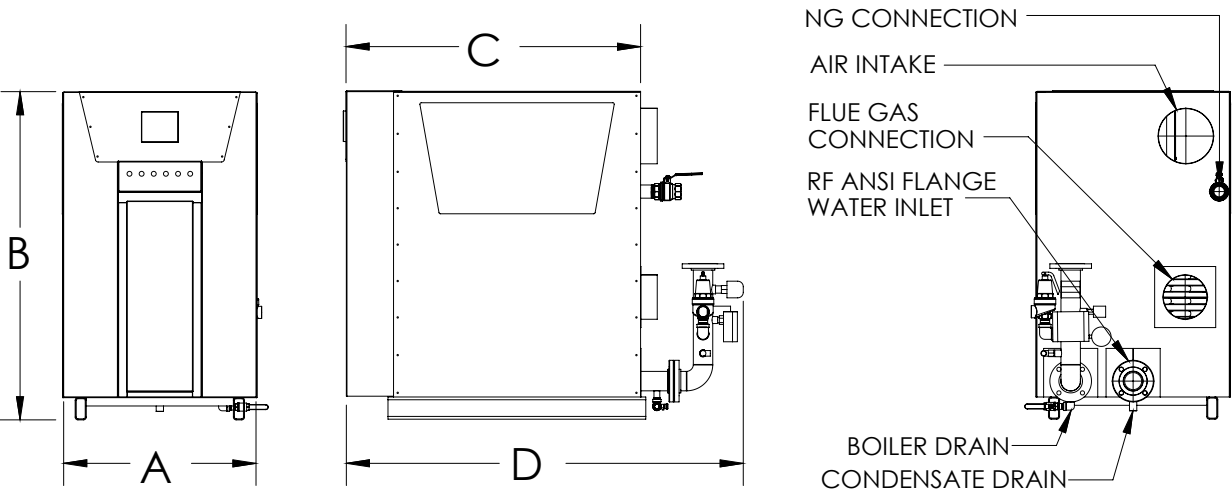

At **Gasmaster**, we ensure that every boiler and water heater we deliver is of the highest quality. We strive to deliver **worry-free** hot water for all customer requirements.

		NX 3000	NX 2500	NX 2000	NX 1500	NX 1000
Input	BTU/hr	3,000,000	2,500,000	2,000,000	1,500,000	1,000,000
	kW	879	733	586	440	293
Output	BTU/hr	2,850,000	2,375,000	1,900,000	1,425,000	950,000
	kW	835	696	557	418	278
Turndown Ratio ¹	X:1	5:1	5:1	5:1	5:1	5:1
Boiler Eff. @ Full Load ²	%	95	95	95	95	95
Side A ⁵	in (mm)	35 (889)	35 (889)	35 (889)	35 (889)	35 (889)
Side B ⁵	in (mm)	82 (2,083)	82 (2,083)	82 (2,083)	60 (1,524)	60 (1,524)
Side C ⁵	in (mm)	54 (1,372)	54 (1,372)	54 (1,372)	54 (1,372)	54 (1,372)
Side D ^{3, 5}	in (mm)	64 (1,626)	64 (1,626)	64 (1,626)	64 (1,626)	64 (1,626)
Shipping Weight ⁴	Lbs.	1,500	1,400	1,300	1,1000	1,000
Supply Connections	Inch	3 (FLANGED)	3 (FLANGED)	3 (FLANGED)	2 (FLANGED)	2 (FLANGED)
Return Connectionn	Inch	3 (FLANGED)	3 (FLANGED)	3 (FLANGED)	2 (FLANGED)	2 (FLANGED)
Water Content	USG	40	33.5	27	21	14.5
Gas Connection	Inch	1.5	1.5	1.5	1.5	1
Flue Connection	Inch	10	10	8	8	6
Flue Duct	Material	All units use air-tight, corrosion-resistant stainless steel				
Max Working Pressure	PSIG	160	160	160	160	160
Max Working Temperature	°F	210	210	210	210	210
Min Inlet Water Temperature	°F	All units require any temperature above freezing point				
Minimum Clearance to Combustibles	Non-combustible floor; 24” sides and back; 12” top; 1” around certified flue pipe					

Because of our commitment to quality, we have no reservations about offering the **best warranty** in the industry for boilers and water heaters. Above all, we want our customers to feel as confident as we are that our boilers will last.



BEST STANDARD WARRANTY

- » 20-Year Thermal Shock Warranty
- » 10-Year Heat Exchanger Warranty
- » 1-Year Warranty on Non-Proprietary Components Installed

"Call us for Extended Warranty Options"

NOTE:

1 Higher turndown ratios available
2 Values can be higher depending on water inlet temperature
3 Size can significantly vary depending on burner selection

4 Approximate dry weight of unit
5 For custom sized please inquire

NOTES

28 YEARS
OF BOILER INNOVATION
INTERNATIONALLY PATENTED

